

Color Your World

Paint the Moments that Matter



Njero® Paints

Customised Paint Solutions

Njero Paints is a company owned by a Switzerland based young Indian business man with a vision of producing quality paint products which, comply with all existing standards prevails in the world market today.

The company was set up on 2005 in, Sanjo Nagar, Thrissur district with a 6500 sq meter factory building and 800 sq meter office building. The surroundings of the company are packed with natural vegetation which creates the mood of eco-friendliness to one who visits our factory.




Our QUALITY Policy

READS

We are committed to manufacture and supply niero paints products Effectively in a professional and environment friendly manner, on time and at the right cost, with utmost customer satisfactioin, while driving to become a world class organisation, through continual improvement.



ROOF TILE IMPRESSIONS PREMIUM TILE COATINGS

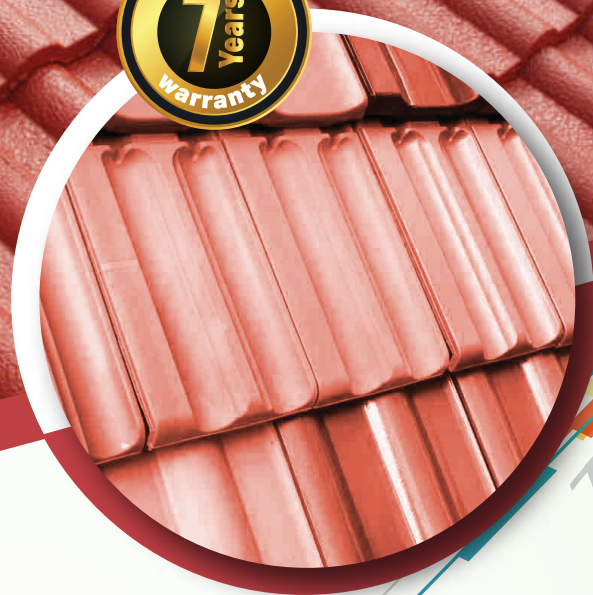


Niero Roof tile Impressions: Silicon based paint with enhanced water resistance, Niero Roof tile Impressions, a Premium Plus exterior Tile Paints, is the best paint in the industry to use the Silicon Technology. Silicon is a powdered chemical which when added to paint imparts visible water repellence to the paint film and water rolls off it keeping your house 100% rain proof. Niero roof tile Impressions is specially formulated to give long-lasting protection and beautiful looks. Tough water repellent paint film, protects from rain, Special preservatives fight algae & fungus, Latex enriched formula gives long-lasting glow to tiles & bricks.

Available Colours

	New Flame Red		Antique Brown		Classic Gray
	Sun Rise		Grape Brown		Slivery Sky
	Flame Red		Grape Wine		Alpen Blue
	Tile Red		Grape Riot		Dark Shadow
	Terracotta		Stone Grey		Spanish Green
	New Terracotta		Deep Grey		

Technical Properties

Description	: 100% Pure Acrylic Tile Coating
Viscosity	: 18 - 22 Second at 29°C when thinned with 1:1 water
Weight/Litre	: 1.22 - 1.27 Kg
Thinning Ratio	: 10:3 - 4
Finish	: Smooth and sheen
Method of application	: By brush or Spray
Hard dry	: 4 hrs.
Available packing	: 20, 10, 4 and 1 Litre packing
Storage	: Keep away from direct sunlight and excess heat
Appearance	: Ready mixed colours
pH	: 7.9 - 8.3
Thinning Media	: Water
Coverage	: 80-100 sqft per liter coat (on clay tiles) 150 - 190 Sq. Ft/Litre per coat (on cement surface)
Area of application	: Roof top Tiles and Cements surfaces
Surface dry	: 30 minutes under normal climatic conditions
Second Coat Interval	: 4 hrs after first coat
Shelf life	: 2 years



OYSTER

LONG LIFE ULTIMATE WEATHER GUARD



Oyster Long Life Ultimate Weather Guard is a high-performance, nanotechnology-based exterior paint specifically engineered to protect walls from harsh environmental conditions. Utilizing advanced nano-particles, this innovative paint forms a tough, invisible shield that effectively resists moisture penetration, keeping walls safe from dampness, efflorescence, and water-related damage. Its cutting-edge formulation ensures superior adhesion and flexibility, making it ideal for use in areas prone to extreme weather changes, including heavy rains, humidity, and intense sunlight.

In addition to its protective features, Oyster Long Life Ultimate Weather Guard is a lead-free, environmentally conscious product that offers long-lasting color retention. Its UV-resistant properties help prevent fading, ensuring your walls maintain a vibrant, fresh appearance for years. Designed for long-term durability, this paint provides a strong defense even in the severest of climatic conditions, making it a reliable choice for both residential and commercial exteriors. Whether you're dealing with coastal humidity or dry inland heat, this paint stands as a dependable solution for lasting beauty and protection.

Technical Properties

Description	: 100% Pure Acrylic Emulsion
Viscosity	: 18 - 22 Second at 29°C when thinned with 1:1 water
Weight/Litre	: 1.10 - 1.25Kg
Thinning Ratio	: 10:3 - 4
Finish	: High Gloss
Method of application	: brush, Roller or Spray
Hard dry	: 4 hrs.
Available packing	: 20,10, 4 and 1 Litre packing
Storage	: Keep away from direct sunlight and excess heat
Appearance	: White, viscous and buttery liquid
pH	: 7.9 - 8.3
Thinning Media	: Water
Coverage	: 170 - 190 Sq.ft/Litre per coat depending upon the porosity of the surface
Area of application	: Cement, concrete & asbestos surfaces
Surface dry	: 30 minutes under normal climatic conditions
Second Coat Interval	: 4 hrs after first coat
Shelf life	: 2 years



NOVEL PREMIUM WEATHER COAT



Technical Properties


Description	: 100% Pure Acrylic
Viscosity	: 18 - 22 Second at 29°C when thinned with 1:1 water
Weight/Litre	: 1.22 - 1.27 Kg
Thinning Ratio	: 10:3 - 4
Finish	: Smooth and sheen
Method of application	: By brush or Spray
Hard dry	: 4 hrs.
Available packing	: 20, 10, 4 and 1 Litre packing
Storage	: Keep away from direct sunlight and excess heat
Appearance	: White, viscous and buttery liquid
pH	: 7.9 - 8.3
Thinning Media	: Water
Coverage	: 170 - 200 Sq.ft/Litre per coat depending upon the porosity of the surface
Area of application	: Cement, concrete & asbestos surfaces
Surface dry	: 30 minutes under normal climatic conditions
Second Coat Interval	: 4 hrs after first coat
Shelf life	: 2 years

Njoro Novel Premium Weather Coat is manufactured with the technical cooperation of Truffel GmbH, Germany. Novel is an all weather luxurious decorative coating for exterior walls with excellent weather resistance, anti-algae properties, water repellent, alkali resistance and elegant egg shell appearance. It contains anti-cracking agent to effectively increase film elasticity thus covering any existing or potential fine lines. It is an ideal choice for renovating or painting of new surfaces. Novel is made out of 100% pure acrylic emulsions, special additives anti corrosive and colour fast pigments. Micro fine extenders are added to achieve optimum quality and performance for a long period with extreme climatic conditions.

Available Colours

White, Base Np2 (white) for light tints, Base Np9 for medium dark, Base Np21 for dark shades, Base Np17 (Yellow) for vibrant impressions

 Jet Black

 Stone Path

 Grey



Eggshell
Finish



Weather
Proof



Long
Lasting



Anti
Fungal



UV
Resistant



MAESTRO

PREMIUM SILICON EXTERIOR EMULSION



Maestro Silicon Exterior Emulsion is a weather coat Exterior emulsion with special attention is paid to improve its water repellence property by adding special additives and silicon in the formulation. Also offers improved alkali resistance and anti algae properties. It also contains anti cracking agent to effectively increase film elasticity thus covering any existing or potential fine crack lines. It is deal choice for renovation or painting or new surfaces. Maestro is made out of 100% pure acrylic emulsions, special additives, anti-corrosive and colour fast pigments. Micro fine extenders are further charged to attritor to achieve optimum quality and performance for a long period with extreme climatic conditions.

Available Colours



Signal Red



Technical Properties

Description	: 100% Pure Acrylic
Viscosity	: 18 - 22 Second at 29°C when thinned with 1:1 water
Weight/Litre	: 1.30 - 1.40 Kg
Thinning Ratio	: 10:3 - 4
Finish	: Smooth and sheen
Method of application	: By brush or Spray
Hard dry	: 4 hrs.
Available packing	: 20, 10, 4 and 1 Litre packing
Storage	: Keep away from direct sunlight and excess heat
Appearance	: White, viscous and buttery liquid
pH	: 7.9 - 8.3
Thinning Media	: Water
Coverage	: 120 - 150 Sq.ft/Litre per coat depending upon the porosity of the surface
Area of application	: Cement, concrete & asbestos surfaces
Surface dry	: 30 minutes under normal climatic conditions
Second Coat Interval	: 4 hrs after first coat
Shelf life	: 2 years



NEST EXTERIOR EMULSION



Nest Exterior Emulsion is an all weather decorative coating for exterior walls with excellent weather resistance, anti-algae properties, water repellent, alkali resistance and elegant egg shell appearance. It contains anti-cracking agent to effectively increase film elasticity thus covering any existing or potential fine lines. It is an ideal choice for renovating or painting of new surfaces. Nest is made out of acrylic emulsions, special additives, anti-corrosive and colour fast pigments. Micro fine extenders are added to achieve optimum quality and performance for a long period with extreme climatic conditions.

Available Colours

 Jet Black

 Signal Red

 Grey



Weather
Proof



Long
Lasting



Anti
Fungal



UV
Resistant

Technical Properties

Description	: 100% Acrylic Exterior Emulsion
Viscosity	: 18 - 22 Second at 29°C when thinned with 1:1 water
Weight/Litre	: 1.30 - 1.40 Kg
Thinning Ratio	: 10:3 - 4
Finish	: Smooth and sheen
Method of application	: By brush or Spray
Hard dry	: 4 hrs.
Available packing	: 20, 10, 4 and 1 Litre packing
Storage	: Keep away from direct sunlight and excess heat
Appearance	: White, viscous and buttery liquid
pH	: 7.9 - 8.3
Thinning Media	: Water
Coverage	: 95- 120 Sq.ft/Litre per coat depending upon the porosity of the surface
Area of application	: Cement, concrete & asbestos surfaces
Surface dry	: 30 minutes under normal climatic conditions
Second Coat Interval	: 4 hrs after first coat
Shelf life	: 2 years



AVATHAR ECONOMIC EXTERIOR EMULSION



Avathar Economic Exterior Emulsion is an all weather decorative coating for exterior walls with excellent weather resistance, anti-algae properties, water repellent, alkali resistance and elegant egg shell appearance. It contains anti-cracking agent to effectively increase film elasticity thus covering any existing or potential fine lines. It is made out of acrylic emulsions, special additives, anti-corrosive and colour fast pigments. Micro fine extenders are added to achieve optimum quality and performance for a long period with extreme climatic conditions.



Technical Properties

Description	: Acrylic Exterior Emulsion
Viscosity	: 18 - 22 Second at 29°C when thinned with 1:1 water
Weight/Litre	: 1.35 - 1.45 Kg
Thinning Ratio	: 10:3 - 4
Finish	: Smooth
Method of application	: By brush or roller
Hard dry	: 4 hrs.
Available packing	: 20, 10, 4 and 1 Litre packing
Storage	: Keep away from direct sunlight and excess heat
Appearance	: White, viscous and buttery liquid
pH	: 7.9 - 8.3
Thinning Media	: Water
Coverage	: 95- 125 Sq.ft/Litre per coat depending upon the porosity of the surface
Area of application	: Cement, concrete & asbestos surfaces
Surface dry:	30 minutes under normal climatic conditions
Second Coat Interval	: 4 hrs after first coat
Shelf life	: 2 years



Superior
Whiteness



Anti
Resistance



FLOOR GUARD

EMULSION

WATER BASE



Niero Floor Guard Is a Water Based Poly Urethane Modified System Acrylic Emulsion which offers Niero a Superior Adhesion and Gloss To Cement Tiles, Paver Blocks, Walkways and Concrete Based Floors. It has Superior hard Paint film and also having good water repellent, Chemical Resistance, UV resistance it also has Anti Algal & Anti fungal properties it act as a weather Guard for the substrate.

Available Colours

	Brick Red		Brown
	PO Red		Paver Grey
	Dark Grey		Silver Grey
	Terracotta		Yellow
	Black		White



Weather
Proof



Long
Lasting



Anti
Fungal



UV
Resistant



Dirt
Repellant



Resistant
to Frost

Technical Properties

Description	: 100% Pure PU Modified Acrylic Exterior Emulsion
Viscosity	: 118 - 22 Second at 29°C when thinned with 1:1 water
Weight/Litre	: 1.12 - 1.20 Kg
Finish	: Semi Gloss
Method of application	: By brush, Roller or Spray
Hard dry	: 4 hrs.
Available packing	: 20, 10, 4 and 1 Litre packing
Storage	: Keep away from direct sunlight and excess heat
Appearance	: Ready Mixed Colours
pH	: 7.9 - 8.3
Thinning Media	: Water
Coverage	: 90 - 100 Sq.ft/Litre per coat depending upon the porosity of the surface
Area of application	: Interlock, Terrace Floor Tiles, Concrete, Cement Tiles, Paver Blocks, Walkways
Surface dry	: 30 minutes under normal climatic conditions
Second Coat Interval	: 4 hrs after first coat
Shelf life	: 2 years

DAMP LOCK

WATER & HEAT RESISTANCE




NIERO DAMP LOCK is a flexible, micro-fiber reinforced elastomeric waterproofing membrane designed for all types of exposed roof slabs (new or old) and terraces (sloped or flat). It offers excellent waterproofing and leak-proofing properties.

Waterproofing Properties: The product provides waterproofing up to 3 bars of positive pressure on vertical surfaces. It offers superior adhesion on all masonry and cementitious surfaces, with a recoat time of 45 minutes. The membrane boasts excellent flexibility with a 200% elongation on horizontal surfaces and a crack-bridging ability of up to 0.5mm, making it ideal for terraces. Additionally, it has heat-reflective properties that help reduce heat transfer through the structure, lowering temperatures by up to 10°C. This heat-reflective feature is applicable only for terraces and in the white shade.



Technical Properties

Description	: 100% Pure Acrylic Exterior Emulsion
Viscosity	: 25 - 28 Second at 29°C when thinned with 1:1 water
Weight/Litre	: 1.23 - 1.27 Kg
Finish	: Smooth and sheen
Method of application	: By brush or roller
Hard dry	: 4 hrs.
Available packing	: 20, 10, 4 and 1 Litre packing
Storage	: Keep away from direct sunlight and excess heat
Appearance	: White, viscous and buttery liquid
pH	: 7.9 - 8.3
Thinning Media	: Water
Coverage	: 25 - 30 Sq.ft/Litre per coat depending upon the porosity of the surface
Area of application	: Cement, concrete & asbestos surfaces
Surface dry	: 30 minutes under normal climatic conditions
Second Coat Interval	: 4 hrs after first coat
Shelf life	: 2 years



SEAL O PRIME

DAMP RESISTANT AND UNDER COATING



Niero Paints Seal O Prime is a modified acrylic, water-based, alkali-resistant primer and sealer. It is designed for application on both interior and exterior cement plaster surfaces. This versatile product offers exceptional adhesion and durability, making it ideal for a variety of building surfaces.

The binder-rich formula of Niero Seal O Prime is specially engineered to seal the porosity of highly absorptive substrates. Its use not only prevents issues like efflorescence, dampness, and alkalinity but also enhances the coverage of subsequent topcoats, ensuring long-lasting protection and improved finish quality.



Technical Properties

Description	: 100% Acrylic Exterior Emulsion
Viscosity	: 18 - 22 Second at 29°C when thinned with 1:1 water
Weight/Litre	: 1.30 - 1.40 Kg
Finish	: Smooth
Method of application	: By brush or roller
Hard dry	: 4 hrs.
Available packing	: 20, 10, 4 and 1 Litre packing
Storage	: Keep away from direct sunlight and excess heat
Appearance	: White, viscous and buttery liquid
pH	: 7.9 - 8.3
Thinning Media	: Water
Coverage	: 120 - 140 Sq.ft/Litre per coat depending upon the porosity of the surface
Area of application	: Cement, concrete & asbestos surfaces
Surface dry	: 30 minutes under normal climatic conditions
Second Coat Interval	: 4 hrs after first coat
Shelf life	: 2 years



BUDGET ECONOMIC EXTERIOR EMULSION



Budget Economic Exterior Emulsion is an all weather decorative coating for exterior walls with excellent weather resistance, anti-algae properties, water repellant, elegant egg shell appearance. It contains anti-cracking agent to effectively increase film elasticity thus covering any existing or potential fine lines. It is made out of acrylic emulsions, special additives, anti corrosive and color fast pigments. Micro fine extenders are added to achieve optimum quality and performance for a long period with extreme climatic conditions.

 Superior Whiteness
  Excellent Opacity



Technical Properties

Description	: 100% Acrylic Exterior Emulsion
Viscosity	: 18 - 22 Second at 29°C when thinned with 1:1 water
Weight/Litre	: 1.35 - 1.45 Kg
Finish	: Matt
Method of application	: By brush or roller
Hard dry	: 4 hrs.
Available packing	: 20, 10, 4 and 1 Litre packing
Storage	: Keep away from direct sunlight and excess heat
Appearance	: White, viscous and buttery liquid
pH	: 7.9 - 8.3
Thinning Media	: Water
Coverage	: 120 - 140 Sq.ft/Litre per coat depending upon the porosity of the surface
Area of application	: Cement, concrete & asbestos surfaces
Surface dry	: 30 minutes under normal climatic conditions
Second Coat Interval	: 4 hrs after first coat
Shelf life	: 2 years

CEMENT PRIMER

ULTRA FINE
LATEX BASED

MASS COAT ECONOMIC CEMENT PRIMER



Niero paints exterior and interior primer (WT) is manufactured with strict IS standards and ISO 9001: 2008 specifications. These primers contain Acrylic Emulsion, world class additives, Incan and dry film preservatives which, are added to get long lasting durable finish.

Niero's exterior and interior primer is very suitable undercoat for walls, asbestos, concrete and brick works before final coats. It gives a suitable subtractive for wall finishing. It is thinned with potable water to achieve brushing consistency.

Mass Coat Int/Ext Cement Primer is manufactured according to strict IS standards and ISO 9001:2008 specifications. This primer contains acrylic emulsion, world-class additives, and dry film preservatives, which are added to achieve a long-lasting finish. Nieros Exterior and Interior Primer is an ideal undercoat for walls, asbestos, concrete, and brick surfaces before applying the final coats. It provides a suitable substrate for wall finishing and can be thinned with potable water to achieve the desired brushing consistency.



POXY FUNCTIONAL EPOXY COATING



Niero Poxy is a single-pack, user-friendly, high-performance epoxy primer coating designed to deliver exceptional results in a variety of applications. Its advanced formulation ensures that it is easy to apply, even for users with limited experience, while maintaining superior protection and durability. This primer acts as an excellent bonding agent for subsequent coatings, improving adhesion and ensuring long-lasting results. Its versatility makes it suitable for a range of substrates, providing a reliable foundation for painting and coating systems in both industrial and commercial settings.

The modified formulation of Niero Poxy offers enhanced protection against adverse climatic conditions, such as high humidity, extreme temperatures, and harsh weather. This makes it ideal for use in environments where the substrate may be exposed to challenging outdoor elements. Additionally, the coating forms an incredibly durable surface that resists corrosion, wear, and chemical damage. Whether used in marine, automotive, or construction applications, Niero Poxy guarantees a robust, long-lasting finish that withstands the test of time and the elements, ensuring the integrity of the coated surfaces.

Available Colours



Grey



Black



Tan Grey



Rust
Proof



Excellent
Hardness



Excellent
Durability



Superior
Brushability



Smooth
Finish



Niero® Paints

Customised Paint Solutions

CUSTOMER CARE



+91 96459 89895



📍 Niero Paints, Nalukettu Po, Valungamury, Thrissur - 680308.

✉ sales@nieropaints.com | nieropaints@gmail.com

➡ www.nieropaints.com

www.nieropaints.com